





Temp : TIC 60 S Solid State Timer

TIC60S :

Timers are ideal when a time delay in energizing a circuit is required. The TIC60S is a delay-on-make timer, When power is applied to the end of the delay period. Time adjust can be with on potentiometer

Wiring Diagram

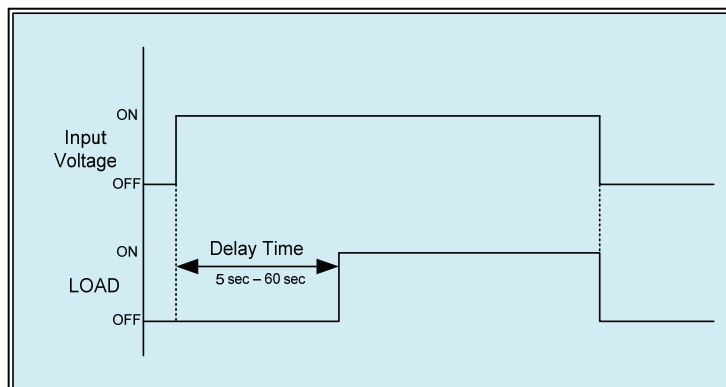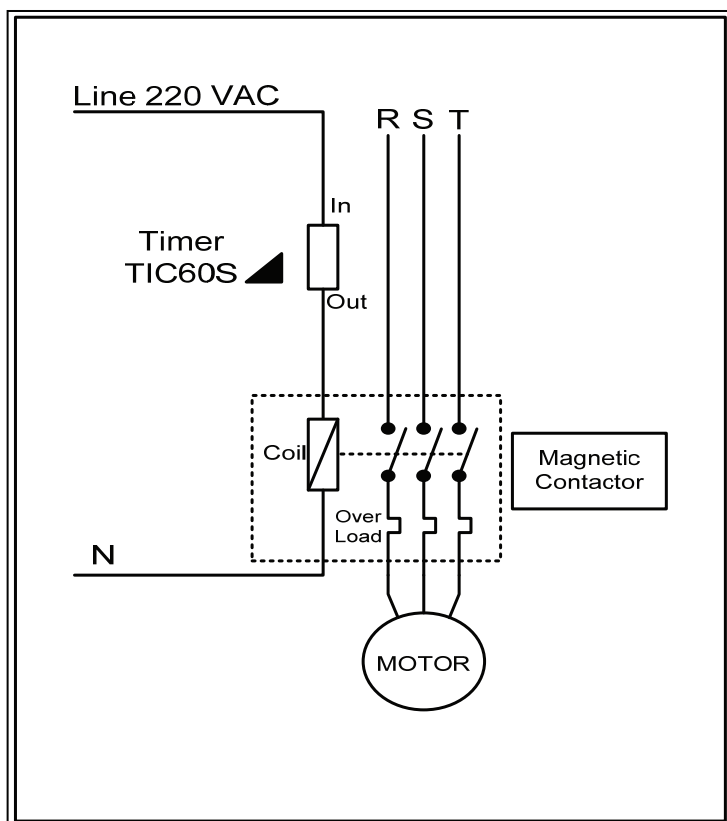

SPECIFICATIONS :

Input Voltage	: 110-220 VAC, 50/60 Hz
Maximum Current	: 1 A
Minimum Current	: 40 mA (leakage)
Time Delay Range	: 5 sec to 60 sec
Operating Temp Range	: -18 to 60
Dimensions(W x H x D)	: 22 x 78 x 50 cm
Mounting	: Din rail